



- NOTES:**
1. WASTEWATER MAIN WYE BRANCH TO MATCH MAIN PIPE MATERIAL.
 2. NO 90° BENDS SHALL BE USED FOR WASTEWATER SERVICE AND CLEANOUT INSTALLATIONS.
 3. SERVICE LATERALS SHALL TERMINATE AT 12" INSIDE THE PROPERTY LINE AT A DEPTH OF 3 FEET EXCEPT WHERE A DEEPER INVERT IS REQUIRED BY EXISTING BUILDING CONDITIONS.

TYPICAL WASTEWATER SERVICE CONNECTION (208)

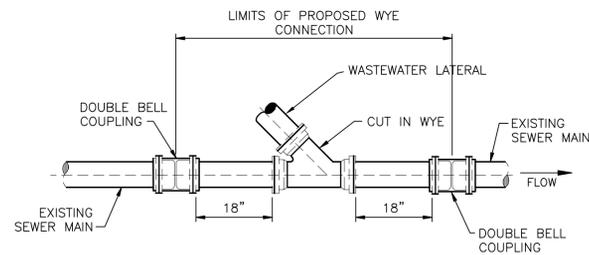


NEW LATERAL ON EXISTING GRAVITY WASTEWATER MAIN (210)

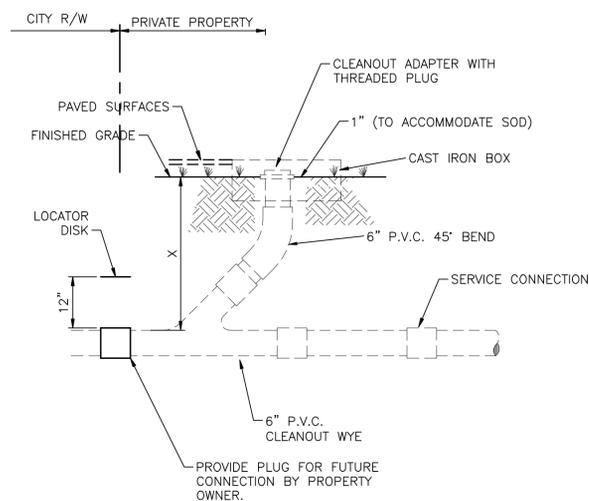

- NOTES:**
1. PROVIDE APPROVED PLUG OR JOINT FOR DISSIMILAR GRAVITY SEWER PIPE FOR SERVICE CONNECTION.
 2. CLEAN-OUT ASSEMBLY SHALL BE INSTALLED BY PROPERTY OWNER.
 3. X=3'0" MIN. OR 4'0" MAX. FOR RESIDENTIAL SERVICE UNLESS OTHERWISE SHOWN.

TYPICAL CLEANOUT INSTALLATION (209)

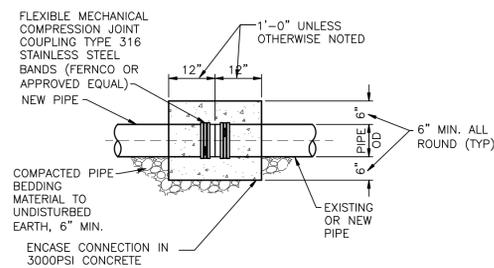

JOINT FOR DISSIMILAR GRAVITY SEWER PIPE (211)

FINAL APPROVAL
FLA. P.E. NO.
00000
PETER PARTINGTON

SCALE:
N.T.S.
DESIGNED BY:
WW2011
CHECKED BY:
WW2011

CITY OF FORT LAUDERDALE
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
FORT LAUDERDALE, FLORIDA

REVISIONS	
NO.	DESCRIPTION

STANDARD DETAIL SHEET

PROJECT # 0000
Name of job
Description
Street Address
SEWER DETAILS

NO. OF SHEETS: 00
SHEET NO.: 0
CAD FILE NO.
XXXXX-001-010DETL
FILE NO.
04-000-00

xx/xx/9x